

# On load-bearing floors with LK Slotted Board EPS 16

## DESIGN

LK Under Floor Heating using LK Slotted Board EPS 16 is for laying on a load-bearing floors only; giving exceptionally low construction height. The product is intended primarily for private living environment. The system is made up of slotted insulation boards, 16 mm thick, with an aluminium heat distribution plate, 0.5 mm thick, factory fixed. The heat distribution plate covers the entire surface of the insulation board. The slotted board, turning board and feeding board are made of high density EPS and provides extremely high resistance to short and long term compression.

## REQUIREMENTS

LK recommends the use of “weather compensation” control of flow temperature for optimum efficiency and that manifolds are balanced in line with LK design data. The settings should be recorded for future reference.

The plates must be laid load bearing floors only. Suitable floor structures are solid floors or suspended floors of minimum 22 mm floor grade chipboard fixed to joists spaced at a maximum of 600 mm. Where ceramic tiles are to be used over suspended floors cross batten at 300 mm. The system can be installed as floating or fixed structure; the choice depends on the kind of floor finish to be used, see section entitled “Surface layer”.

LK recommends reference to local or international building regulations where relevant and trade organisations specialising in flooring materials.


## CONSTRUCTION OUTLINE

### 1. Load-bearing floor construction

### 2. Vapour barrier (when parquet and laminate flooring are laid as surface layers).

### 3. LK Slotted Board EPS 16

Dimensions 1200 x 600 x 16 mm with four slots, c/c 150 mm, suitable for LK Under Floor Heating Pipe 12. The aluminium heat distribution plate is factory fixed.

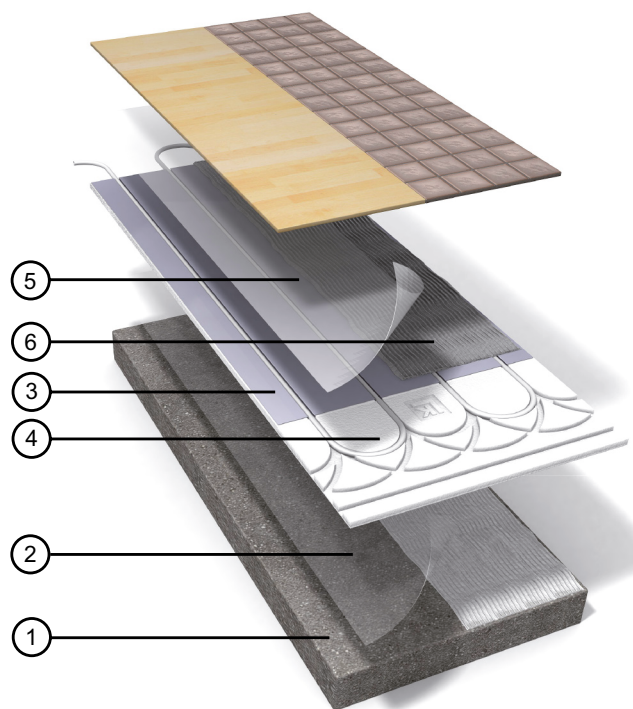

LK Slotted Board EPS 16

### 4. LK Turning Board EPS 16

Dimensions 600 x 300 x 16 mm

### 5. Cellfoam

### 6. Adhesive


Adhesive layer between insulation board and the sub-floor. When using ceramic plates, insulation boards, other layers and surface layer should be attached. Ceramic tiles are not laid out “floating”.

## SURFACE LAYER

(For detailed information on this topic, see the section entitled “Installing the final floor finish”.)

### Parquet or laminate floor

The heating plates are laid out “floating” over a PE vapour barrier. The vapour barrier is placed at the bottom of the structure to avoid possible squeaking sounds between insulation board and the floor (vapor barrier under parquet thus deleted). Then open-cell foam sheet, over which, is laid the final wood floor. Surface layer must be at least 9 mm thick.

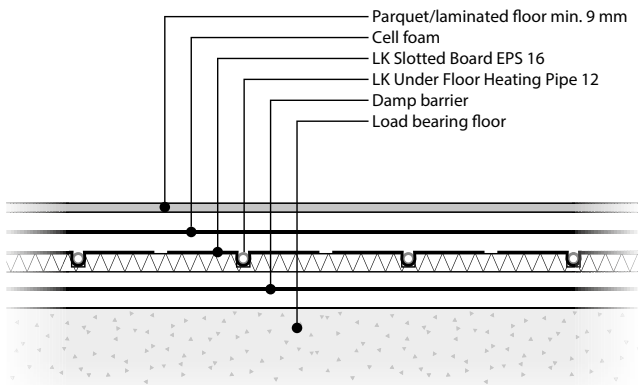


LK EPS 16 laid out "floating" on load bearing floor. Surface layer parquet.

### Plastic or linoleum carpets

Dry areas


The heating plates are laid out "floating" over a PE vapour barrier. The selected location of the vapour barrier is to eliminate any problems with squeaking sounds between insulation board and the subfloor. Soft floor finishes require an additional sub-floor. Lay cellfoam over the heating plates then lay 12 mm (minimum) chipboard over the cellfoam.

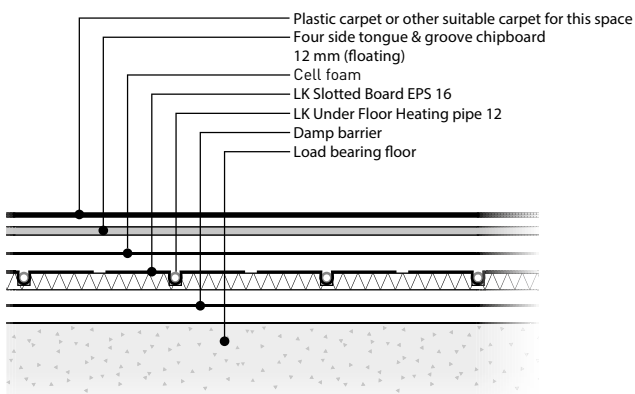

LK EPS 16 laid out "floating" on load bearing floor in dry areas. Surface layer plastic carpet or other suitable carpet.

Wet areas and an alternative solution for dry areas

The heating plates are glued to the sub-floor. Levelling compound (filler) is applied to form a drainage slope (minimum 12 mm thick adjacent to a floor drain). Vinyl flooring is then laid over the floor.

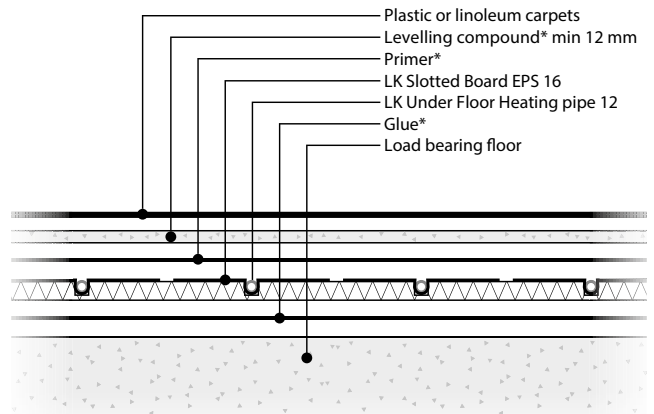


\*See product summary, adhesive & primer

LK EPS 16 glued on load bearing floor in wet areas. Surface layer plastic or linoleum carpets

### Ceramic tiling or natural stone

Dry areas

The floor-based heating plates are glued to suitable strengthened sub-floor. Ceramic tiling/natural stone is fixed (adhesive) direct over the heating panels. Smallest approved tile size 10x10 cm.

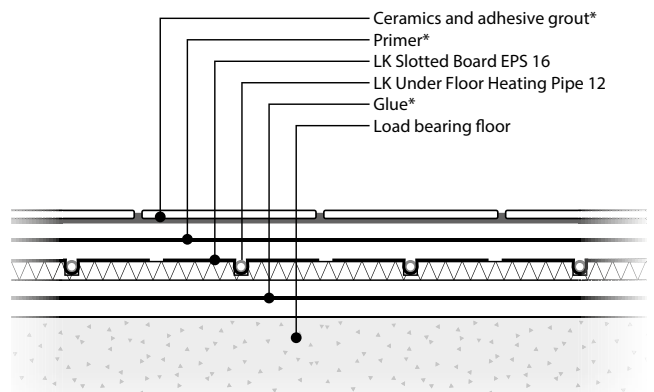


\*See Product summary, adhesive & primer

LK EPS 16 glued on load bearing floor in dry areas. Surface layer ceramics.



### Wet areas

The heating plates are glued to the sub-floor. The appropriate primer and levelling compound (filler) is then applied to form drainage slope (minimum 12 mm thick adjacent to a floor drain). A damp proof membrane or ceramic tiling is fixed to the floor.

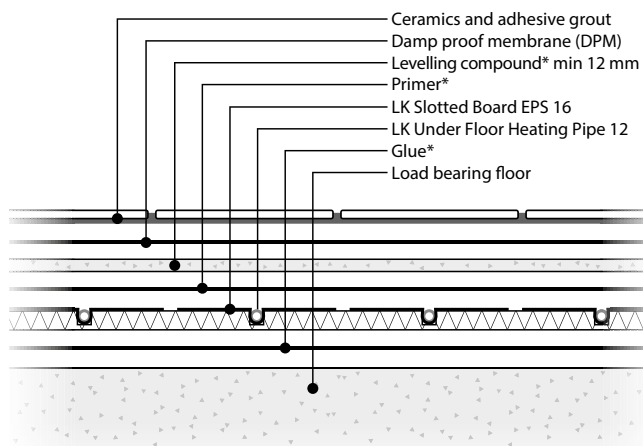

\*See Product summary, adhesive & primer

*LK EPS 16 glued on load bearing floor in wet areas. Surface layer ceramics.*

## LK HEATING CIRCUIT MANIFOLD

The LK Heating Circuit Manifold should be installed as shown in the design drawing. Please read the instructions enclosed with the manifold.

## LAYING PROCEDURE

### NOTE!

Before laying out the plates, inspect the sub-floor to ensure it is level to a maximum curvature  $\pm 3$  mm over a distance of 2 metres and  $\pm 1.2$  mm over a distance of 0.25 metres. The sub-floor must be vacuumed to remove any dirt or dust.

### 1. Turning boards

Begin the job by laying out the turning boards. Position the first turning board (which may need shortening) so that the pipe bends coincide with the intended pipe lay-out. Leave a minimum 5 mm for expansion gap alongside walls and other fixed obstacles.

### 2. Slotted boards

Position the slotted boards so that a minimum 5 mm is left for expansion alongside walls and other fixed obstacles. Cut slotted boards using a jig-saw. Ensure that no metal burrs are left in any pipe slots. Remove all burrs by using a file or sharp blade.

### 3. Feeding boards

Feeding boards are used for flow and return pipe runs, they are also used where the heating plates do not precisely fit a rooms dimensions. Leave a minimum 5 mm for expansion alongside walls and other fixed obstacles.

## GLUEING OF UNDER FLOOR HEATING PLATES

### NOTE!

Only the glues, primers, adhesives, and levelling compounds (fillers) that are stated in these instructions may be used. See the **'Product summary, adhesive and primer'** section.

Prior to gluing the plates, ensure that the sub-floor is level. See the **'Laying procedure'** section.

### Bostik

Bostik recommends two different products for gluing the LK Slotted Board EPS 16.

A500 Combi or A720 Power

A500 Combi or A720 Power should be used when the lowest possible construction height is desirable. This adhesive should not, however, be used on concrete floors or floors in environments in which there is a possibility of rising damp, such as cellars.

The moisture content must not exceed the maximum values specified by local or international building regulations. Glue, coating and sub-floor should have a temperature of at least  $+15^{\circ}\text{C}$ . Relative humidity in the sub-floor (RF) must not exceed 85% for concrete and 8-12% for chipboard.

For non-absorbent surfaces such as high-performance concrete, the application of a minimum 10 mm thick layer of Bostik Golvspackel is recommended.

If there is a risk of rising damp, Bostik 8040 Flow LT or Kiilto Floorfix DF should be used. For more information, see the sections relating to the two brands, located below. Please note that under-floor heating will not resolve potential problems with damp. Instead, the underlying causes need to be determined and resolved.

EPS 16 heating boards can be glued to porous surfaces such as chipboard, plasterboard, and cement tiles using A500 Combi or A720 Power. **There must be no rising damp present.**



A500 Combi or A720 Power is suitable for gluing against concrete floors. The surface should be free of oil, grease, paint or other substance that will prevent bonding.

The A500 Combi or A720 Power is applied to the plates.

- The adhesive is spread/combed out with a notched trowel. Adhesive usage is approx. 2-3 m<sup>2</sup>/l depending on surface and choice of application method.
- Adjust/centre the turning boards and the slotted boards so that the pipe slots are aligned.

Drying time is approx. 12 hours. Drying time is affected by both room temperature and humidity. When gluing materials where one surface is dense good strength is achieved within a few days. At gluing of e.g. PVC with polyethylene refelt against a PVC substrate, final strength is achieved between 4-7 days.

**When glueing EPS 16 heating plates to a sub floor, it is particularly important that the plates are firmly pressed down into the glue to create the necessary adhesion.** For good adhesion, it may be necessary to use sandbags/weights or to screw the plates down. Avoid “unnecessary treading” on the plates before the adhesive has properly set.

Adhesive thickness: approx. 1 mm.

A500 Combi eller A720 Power is stocked by LK.

Bostik 8040 Flow LT and P7000

The underfloor heating boards can also be affixed to porous surfaces such as concrete, plasterboard, and cement tiles using Bostik 8040 Flow LT and P7000 (adhesive + dispersion). The surface should be free of oil, grease, paint, and any other substance that may prevent bonding. Mix 15 kg of 8040 Flow LT with 1.5 litres of P7000 and 2.3 litres of water. Thoroughly work the adhesive into the surface before ‘combing’ it out with an 8 mm combing tool. Press the board firmly into the wet adhesive. Adjust/centre the turning boards and the slotted boards so that their pipe slots are aligned.

Drying time is approximately 48 hours (at +20°C, 50% RH). Drying time is affected by air temperature and humidity in the room.

Adhesive thickness: approx. 4 mm.

Bostik 8040 Flow LT and P7000 are not kept in stock by LK.

### Kiilto

EPS 16 heating plates can also be fixed with Kiilto Floorfix DF to porous surfaces such as concrete, chipboard, plasterboard and cement tiles.

The surface should be free of oil, grease, paint or other substances that will prevent bonding. Adjust/centre the turning boards and the slotted boards so that the pipe slots are aligned. Drying time is approx. 32–48 hours. Drying time is affected by room temperature and humidity.

Mix the Kiilto Floorfix DF with Kiilto Fixbinder and 2 litres of water; 5 litres of binder to 20 kg of Flytfix. Spread the adhesive with a putty-knife; work in the adhesive before “combing” it out. Use a comb size of 8 mm for the plate. Lay the plate and press firmly down into the adhesive.

When glueing EPS 16 heating plates to a sub floor, it is **particularly** important that the heating plates are firmly pressed down into the glue to create the necessary adhesion. For good adhesion, it may be necessary to use sandbags/weights or to screw the plates to the surface. Avoid “unnecessary treading” on the plates before the glue has properly set. Drying time is approx. 32–48 hours. Drying time is affected by room temperature and humidity. Adhesive thickness: approx. 4 mm

Kiilto Floorfix DF and Kiilto Fixbinder are stocked by LK.

### PRIMING OF UNDER FLOOR HEATING PLATES

The topside of the plates must be primed if the intention is to apply tiles directly to the plates. Use Kiilto Start Primer or Bostik GRIP A936 Xpress.

Ensure the plates are clean; vacuum or alternatively wet/dry vacuum carefully. There must be no grease or oil on the plates and any present must be cleaned off. Apply primer with a brush, including any unused slots. Allow the primer to dry properly (the surface should be totally dry).

Kiilto Start Primer is stocked by LK.

GRIP A936 Xpress is **not** stocked by LK.




## LAYING THE PIPE

Plan the pipe lay-out so that flow and return pipes are not crossed. The pipe lay-out must be done as the LK drawing. Use the LK Pipe Decoiler as an aid. Ensure the coil is laid so that outward flow runs along outer walls. Number and name the loops as per the drawing. Before laying out the pipe, check to see that there are no grit or sharps in the slots.

Cut the pipe using LK Pipe Cutters only. Where several flow and return pipes are connected to manifolds, the floor will have inadequate load bearing capacity. To ensure a level floor, that is strong enough to support furniture and other domestic loads, the insulation boards must be removed from the immediate area around the manifold and the pipes encapsulated in self levelling screed.

### 4. Laying out the pipe

Press the pipe (by stepping on it) down and into the slotted board. For the installation to be properly complete the pipe must be fully in the slots and under no circumstances must the pipe come into contact with the overlying flooring.

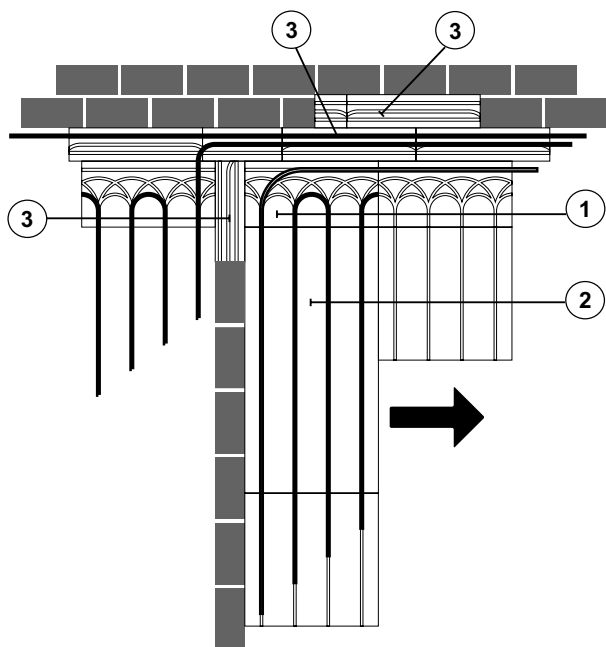

## INSTALLING FINAL FLOOR FINISH

### Parquet or laminate floor

The heating plates should be laid "floating", see section '*Laying procedure*'. The structure is then

covered with cellfoam. Lay the "floating floor" at right-angles to the direction of the heating loops. Adhere to the instructions provided by the supplier of the wood flooring, as well as national guidelines. Seek advice from LK if the flooring thickness exceeds 25 mm.

### Vinyl, linoleum or carpets

#### Dry areas

The heating plates should be laid "floating", see section '*Laying procedure*'. The plates are then covered with cellfoam (do not use rag board in connection with floor-based heating plates as this can result in squeaking sounds). Next, float 12 mm chipboard (minimum) over the cellfoam. Glue the chipboard panels along the tongue-and-groove edges as set out in the chipboard manufacturer's instructions. Leave 10 mm for expansion joints alongside walls and other fixed obstacles.

Finally, glue or lay the final floor finish over the chipboard flooring as set out in the manufacturer's instructions.

#### Wet areas and an alternative solution for dry areas

The heating plates should be glued onto load-bearing floor structures; see the section entitled '*Glueing of under floor heating plates*'. Ensure that the heating plates are clean; use a vacuum cleaner if necessary. There must be no oil or contaminants on the plates. Apply a coating of Kiilto Start Primer alternatively Bostik GRIP A936 Xpress. Also apply the coating to unused pipe slots. Drying time 1-2 hours.

Apply Kiilto Floor Heat DF or SL C500 Fiber Quick in order to form an adequate drainage slope and to be at least 12 mm thick adjacent to floor drain. Drying/hardening time is 3-5 days (this relatively long drying time is explained by the fact that the drying takes place via one side only). The next step is to glue on the vinyl. Adhere to the instructions provided by the manufacturer.

### Ceramic

#### Dry areas

The heating plates should be glued onto load-bearing floor structures; see the section entitled '*Glueing of under floor heating plates*'. Ensure heating plates are clean; use a vacuum cleaner if necessary. There must be no oil or contaminants



on the plates. Apply a coating of Kiilto Start Primer or Bostik GRIP A936 Xpress. Also apply the coating to unused pipe slots. Drying time 1-2 hours. Only start to lay ceramic tiles once the primer is dry. Apply Kiilto Floorfix DF with a spreader trowel. NOTE: If natural stone should be laid, use Kiilto Flytfix DF instead. Adhere to the instructions provided by the manufacturer.

#### Wet areas

The heating plates should be glued onto load-bearing floor structures; see the section entitled '*Glueing of under floor heating plates*'. See to it that the floor-based heating plates are clean; use a vacuum cleaner if necessary. There must be no oil or contaminants on the plates. Apply a coating of Kiilto Start Primer. Extend the coating application also to unused tubing grooves. Drying time 1-2 hours.

Wet facilities make it necessary to spread a layer of self levelling screed on the heating plate, treated with a primer coating to provide the floor with the necessary slope to the floor drain. The minimum thickness of such a levelling compound coating adjacent to the floor drain is 12 mm; use Kiilto Floor Heat DF alternatively Bostik SL C500 Fiber Quick for this purpose. Drying/hardening time is 3-5 days (this relatively long drying time is explained by the fact that the drying takes place via one side only). A sealing layer followed by ceramic tiling can then be applied. Adhere to the instructions provided by the manufacturer.



## PRODUCT SUMMARY, ADHESIVE & PRIMER

The following brands/products have been tested to be used for glueing and priming of our plates. Never combine different brands so that they have direct contact with each other, e.g. Bostik Primer with Kiilto Flytfix.

**NOTE!**

Only the glues, primers, adhesives, and levelling compounds (fillers) that are stated in these instructions should be used. Prior to glueing the plates, ensure that the sub-floor is level. See the '**Laying procedure**' section.

LK art. no.	Product name	Usage	Notes	Consumption	Drying time
33525	Kiilto Floorfix DF, 20 kg	Glueing of the form stable plate against intermediate floor	Mix 5 litres Fixbinder and 2 litres water with 20 kg Floorfix DF	3,5 kg / m <sup>2</sup>	32–48 hours
33522	Kiilto Fixbinder, 5 litres	Glueing of under floor heating plates	Mix 5 litres Fixbinder and 2 litres water with 20 kg Floorfix DF	5 l / 20 kg Floorfix DF (+2 l water)	Not applicable
33521	Kiilto Start Primer, 3 litres	Priming of under floor heating plates	Only to be used with other Kiilto products	1 l / 10 m <sup>2</sup>	1-2 hours
Not stocked	Kiilto Fix Primer, 5 litres (alt. primer to Kiilto Start Primer)	Primarily for priming of dense surfaces, e.g. aluminium but also for some absorbing surfaces like the UFH board.	Only to be used with other Kiilto products	1 l / 5 m <sup>2</sup>	1-2 hours
33525	Kiilto Floorfix DF, 20 kg	Glueing of ceramics <b>Note!</b> Not to natural stone	Mix in accordance with the instructions on the bag	3.5-5 kg/m <sup>2</sup> (Depending on the size of the ceramic tile)	48 hours
33526	Kiilto Flytfix DF	Glueing of ceramics and natural stone.	Mix in accordance with the instructions on the bag	3.5-5,5 kg/m <sup>2</sup> (Depending on the size of the ceramic tile)	5 hours
33524	Kiilto Floor Heat DF, 20 kg	Creating drainage slopes	Only to be used with Kiilto Start primer	1,7 kg/m <sup>2</sup> /mm	3-5 days

LK art. no.	Product name	Usage	Notes	Consumption	Drying time
33523	Bostik A500 Combi or A720 Power, 10 liter	Glueing of under floor heating plates	Not to be used in cases of rising damp	2-3 m <sup>2</sup> / l	12 hours
Not stocked	Bostic 8040 Flow LT	Glueing of under floor heating plates	Mix 15 kg of 8040 Flow LT with 1.5 litres of P7000 and 2.3 litres of water.	3,0 kg / 8 m <sup>2</sup>	48 hours
Not stocked	Bostik P7000	Glueing of under floor heating plates	Mix 15 kg of 8040 Flow LT with 1.5 litres of P7000 and 2.3 litres of water.	1,5 l/15 kg P7000, Flow LT (+2,3 l water)	48 hours
Not stocked	Bostik GRIP A936 Xpress	Priming of under floor heating plates	Always applied to the floor heating board aluminum	0,15 l / m <sup>2</sup>	1-2 hours
Not stocked	Bostic 8040 Flow LT	Glueing of ceramics to under floor heating plates	Mix 15 kg of 8040 Flow LT with 1.5 litres of P7000 and 2.3 litres of water.	3.0-5,0 kg/m <sup>2</sup> (Depending on the size of the ceramic tile)	48 hours
Not stocked	Bostik SL C500 Fiber Quick	Creating drainage slopes	GRIP A936 Xpress is applicated before SL C500	1,8 kg/m <sup>2</sup> /mm	3-5 days

